

Congratulations on choosing our ultra-reliable KeySecurity, the ideal solution for keys and keycards. The KeySecurityBox is extremely durable and, thanks to the range of models, there's always a solution to meet your need..

You have chosen either the KSB 001 (with the deposit wheel on the left) or the 002 (with the deposit wheel on the right). Both are intended for installation against a wall. As described below, there are two ways to do this.

A - With anchor bolts or key bolts.

These are suitable for installation in solid materials such as concrete, hard stone and hard natural stone (maximum M10).

B - With screw studs through the wall.

If the wall consists of a porous type of stone or any other non-solid construction material, drill holes through the wall and then install the safe using screw studs on which you install the wall installation plate on the inside using rings and bolts.

Note: before you start, use drawing 1 to determine the place where you want the safe to be installed. Also choose the installation method **A** or **B** as described above. See also drawing 2 for more details.

NB If need be – ask your local hardware store about the installation material and when drilling always make sure you avoid pipes or wires.

Specifications

Models: KSB 001 and KSB 002
Dimensions: 215 x 215 x 395 mm
Colour: RAL 9006


Box content

- 1 x KeySecurityBox
- 1 x floor mat for in the safe
- 4 x Ring ø 30 mm, hole ø 10.5 mm
- 2 x safe key


You will need the following for installation

- (not included)
- Flexible steel rule
 - Pen/pencil
 - Level
 - Hammer drill with drill
 - Spanner and/or socket wrench
 - Anchor bolts or key bolts (installation **A**)
 - Screw studs plus bolts (installation **B**)


1 Determine where you want to install the safe. Make sure there is at least 30 cm between the safe and any corners, the end of the wall, floor and ceiling.

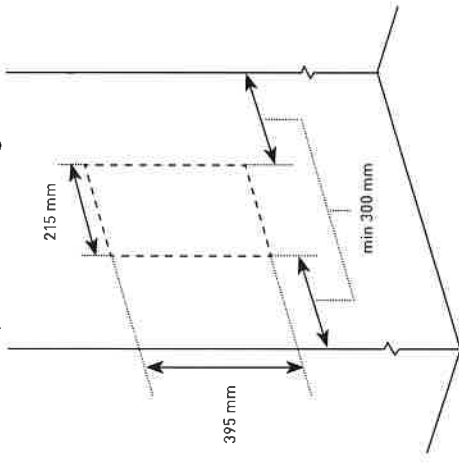

3 Install the safe using the chosen installation method **A** or **B**

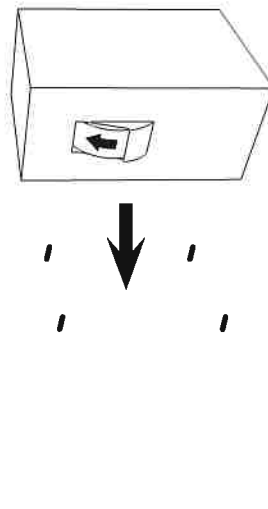


Model 001

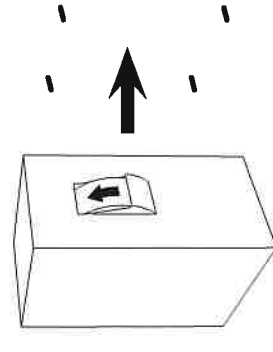

Model 002


2

Draw the drill holes on the wall. Drill four holes in the wall. Consult the description of your installation materials with respect to the diameter and depth of the holes.

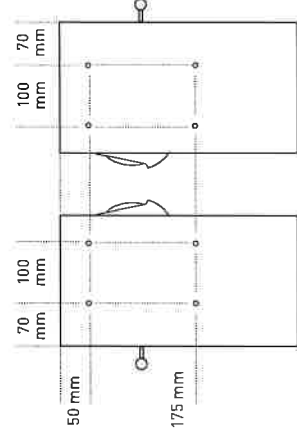

Model 001

Model 002

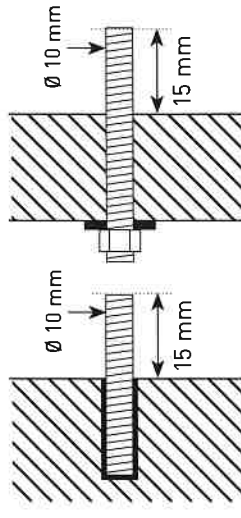


installation method **A**

installation method **B**

4

Place the rings and bolts inside the safe on the wire end [4x] and tighten firmly. Your safe is ready for use.

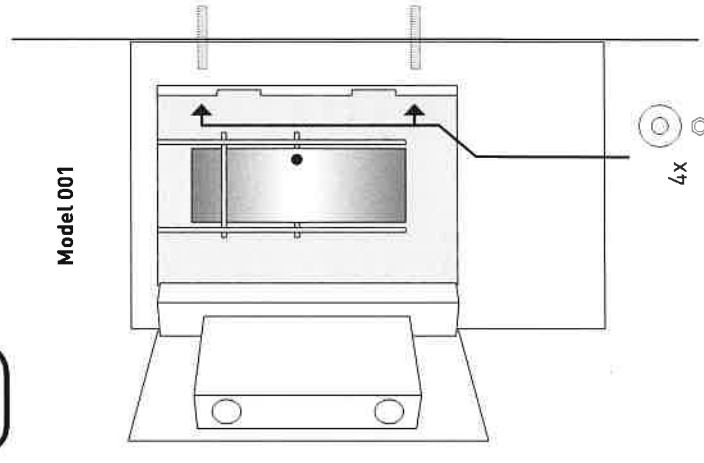

Model 001

Model 002